
Method for Removing Residual Water from Fuel Cell

ID# 2009-3566



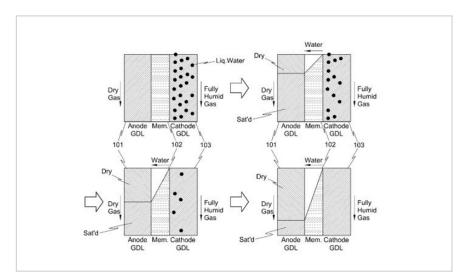

Preferred Embodiment of Method

Technology Summary

A method for removing residual water in a fuel cell, which controls the humidity of purge gases to effectively remove residual water in the fuel cell and to maintain the humidity in a membrance at a constant level, this ensuring the durability of the membrane. The method for removing residual water is characterized in that the relative humidities of purge gases supplied to an anode and a cathode are controlled to selectively reduce water content in the fuel cell and water content in a membrane.

Application & Market Utility

For use in any and all motor vehicles. Specific use in hybrid vehicles, electric vehicles, plug-in vehicles, hydrogen-powered vehicles, and other alternative fuel vehicles.

Next Steps

Seeking licensing opportunities.

TECHNOLOGY READINESS LEVEL

4-7

Seeking

Investment | Licensing | Research

Keywords

- fluid discharge
- residual water
- fuel cell
- controlled humidity
- hybrid vehicles

Researchers

Matthew Mench

Associate Professor, Department of Mechanical Engineering Online Bio

Jong Jin Yoon

Graduate Student Researcher

Jong Hyun Lee

Graduate Student Researcher

Other Researchers

Kyu Taek Cho

Originating College

College of Engineering

Office of Technology Management Contact

Swope, Bradley bas101@psu.edu 814-863-5987

