# Printable, Programmable Self-Assembled 2D Biocomposites ID# 2016-4539



## TECHNOLOGY READINESS LEVEL 4-7

### Seeking

Investment | Licensing | Research

### Keywords

- biocomposites
- 2D materials
- self-assembly
- structural proteins
- tandem repeats

### Researchers

**Melik Demirel, PhD** 

Director, Center for Advanced Fiber Technologies; Professor of Engineering Science and Mechanics <u>Online Bio</u>

### Mauricio Terrones, PhD

Director, Center for 2-D and Layered Materials; Professor of Physics, Chemistry and Materials Science and Engineering Website


#### Ibrahim Tarik Ozbolat, PhD

Associate Professor of Engineering Science and Mechanics Website

#### Other Researchers Mert Vural, PhD

**Originating College** College of Engineering

Office of Technology Management Contact Ritter, Dustin dwr18@psu.edu 814-863-7070

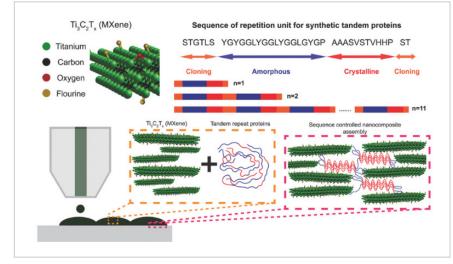

Printing and Response of Biocomposite

# **Technology Summary**

This technology relates to a method of making a biocomposite material comprising 2D inorganic layers (e.g., graphene oxide, titanium carbides, etc.) and polypeptides with alternating repeats of crystalline and amorphous domains. The method involves combining the inorganic materials and polypeptides in an organic solvent and printing them onto a substrate, which results in formation of biocomposite layers comprising the polypeptides and inorganic material. Repeated deposition will result in a multilayered biocomposite. The figure above provides a schematic representation of protein-mediated assembly of titanium carbide sheets during printing, as well as the sensor response of conductive lines with various thicknesses of biocomposite material printed on a PET substrate during humidity cycles alternating between 60 – 70% RH (left), 60 – 80% RH (center), and 60 – 90% RH (right).

# Application & Market Utility

This technology enables stimuli-responsive biocomposite electrodes to be printed on various substrates such as paper, glass, and flexible polymers. These electrodes have shown electrical conductivity values that far exceed those of leading inkjet-printed electrodes composed of other 2D materials including graphene and reduced graphene oxide, and this is sustained under excessive bending. These biocomposite electrodes also exhibit effective EMI SE values reaching 50 dB for a film thickness of 1.35  $\mu$ m. Finally, responsiveness to stimuli other than humidity is being explored.

# Next Steps

Seeking investment, licensing opportunities, and/or research collaborations.



Invent Penn State is a Commonwealth-wide initiative to spur economic development, job creation, and student career success. Invent Penn State blends entrepreneurship-focused academic programs, business startup training and incubation, funding for commercialization, and university-community collaborations to facilitate the challenging process of turning research discoveries into valuable products and services that can benefit Pennsylvanians and humankind. Learn more at invent.psu.edu.

Penn State is an equal opportunity, affirmative action employer, and is committed to providing employment opportunities to all qualified applicants without regard to race, color, religion, age, sex, sexual orientation, gender identity, national origin, disability or protected veteran status.